

UP TO 11 GHz



Miniaturized microwave cable assembly matched to SMA connectors

MAIN ADVANTAGES

- > Miniaturized cable : \varnothing 1.05 mm.
- > High flexibility.
- > Miniaturized straight and right angle connectors.
- > High frequency : up to 11 GHz.

CABLE ASSEMBLY GENERAL CHARACTERISTICS

- > Temperature rate : $-55/+125^{\circ}\text{C}$.
- > Impedance : 50Ω .
- > VSWR < 1.35 up to 2GHz and < 1.9 up to 11GHz.

APPLICATIONS

- > Military applications.
- > Any application where miniaturization, flexibility and high frequency are the most important criteria.


www.axon-cable.com

 **axon'**
CABLE & INTERCONNECT

Miniaturized microwave cable assembly matched to SSMA connectors

CABLE CONSTRUCTION


- 1 – Silver plated copper alloy conductor with extruded PTFE dielectric.
- 2 – Silver plated copper braided shield.
- 3 – FEP outer jacket.

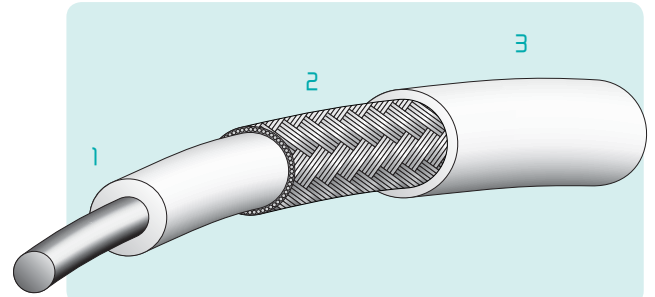


CABLE GENERAL CHARACTERISTICS

Approx. weight : 2.9 g/m
 Temperature rating : -90°C /+200°C
 Capacitance : 97 pF/m
 Impedance : 50 ±5 Ω
 Attenuation at 200 MHz : 110 dB/100m


TECHNICAL CHARACTERISTICS

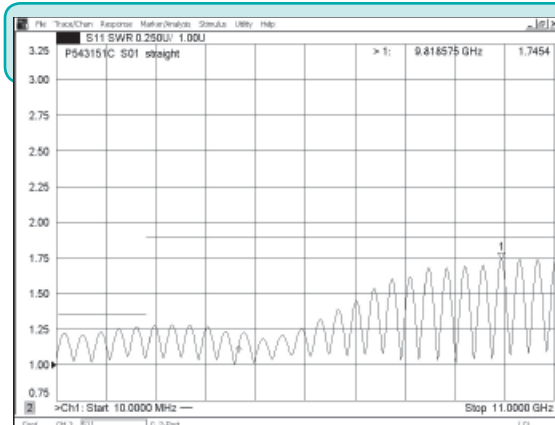

VSWR for cable assembly with straight connector

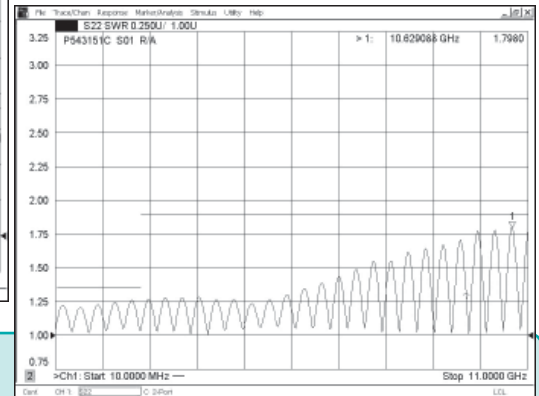

VSWR for cable assembly with right angle connector

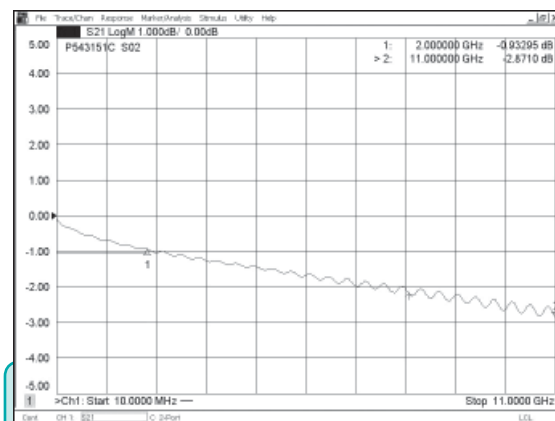

Cable assembly attenuation

ALL RIGHTS RESERVED - ALL INFORMATION CONTAINED IN THIS BROCHURE IS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE